

A Working Group Draft Standard of the Joint Committee

NTCIP 1403 v. 1.03

-- DRAFT Amendment 1

Transit Communications Interface Profiles

**Part of the National Transportation Communications for
ITS Protocol**

Standard on Passenger Information (PI) Objects

Draft August 2002

Also referenced as TCIP-PI

This is a draft document, which is distributed for review and comment purposes only. You may reproduce and distribute this document within your organization, but only for the purposes of and only to the extent necessary to facilitate review and comment to the **TCIP WG Chair**. Please ensure that all copies reproduced or distributed bear this legend. This document contains preliminary information that is subject to change.

Published by

American Association of State Highway and Transportation Officials (AASHTO)
444 North Capitol St., N.W., Suite 249
Washington, D.C. 20001

Institute of Transportation Engineers (ITE)
1099 14th Street, N.W., Suite 300 West
Washington, D.C. 20005-3438

National Electrical Manufacturers Association (NEMA)
1300 North 17th Street, Suite 1847
Rosslyn, Virginia 22209-3801

© Copyright 2002 AASHTO / ITE / NEMA. All rights reserved.

© 2002 by the American Association of State Highway and Transportation Officials (AASHTO), the Institute of Transportation Engineers (ITE), and the National Electrical Manufacturers Association (NEMA). All intellectual property rights, including, but not limited to, the rights of reproduction in whole or in part in any form, translation into other languages and display are reserved by the copyright owners under the laws of the United States of America, the Universal Copyright Convention, the Berne Convention, and the International and Pan American Copyright Conventions. Except for the electronic Data Dictionary, do not copy without written permission of either AASHTO, ITE, or NEMA.

FOREWORD

This document uses only metric units.

This document is an NTCIP Information Data Dictionary Standard. Information Data Dictionaries Standards formally express management information in terms of objects (data elements, data frames, and messages) for use within TCIP and NTCIP systems.

The TCIP family of standards addresses Advanced Public Transportation Systems (APTS) data interfaces and related automated transit tools and data. The standards address the business requirements of these APTS data interfaces. In some cases, specialized terms were needed to define general classes of information. For example, different business areas needed to define data elements related to time, date and footnotes. Special, constrained data types were developed so that the transit domain data concepts were consistent across business areas, while specific needs were met. These data types are defined within the TCIP family of standards and in this document.

For more information about NTCIP standards, visit the NTCIP Web Site at <http://www.ntcip.org>. For a hardcopy summary of NTCIP information, contact the NTCIP Coordinator at the address below.

In preparation of this NTCIP document, input of users and other interested parties was sought and evaluated. Inquires, comments, and proposed or recommended revisions should be submitted to:

NTCIP Coordinator
National Electrical Manufacturers Association
1300 North 17th Street, Suite 1847
Rosslyn, Virginia 22209-3801
fax: (703) 841-3331
e-mail: ntcip@nema.org

Approvals

This document will be separately balloted and approved by AASHTO, ITE, and NEMA after recommendation by the Joint Committee on the NTCIP. Each organization is expected to approve this NTCIP Information Data Dictionary Standard as the following standard type, as of the date:

AASHTO – Standard Specification; Month YYYY
ITE – Software Standard; Month YYYY
NEMA – Standard; Month YYYY

History

From 1997 to 1999, this document was referenced as ITE ST-ITS-TCIP-PI and/or NEMA TS 3.TCIP-PI. However, to provide an organized numbering scheme for the NTCIP, this document is now referenced as NTCIP 1403. The technical specification of NTCIP 1403 is identical to the former reference, except as noted in the development history:

TCIP documents version 0.1. Distributed in September 1997 for public review.

TCIP-PI Recommended Standard version 1.0, February 20, 1998, changed to version 1.1, July 31, 1998. Revisions included: Sections 2.1, 2.3, 4.3, 5.1, and 5.2.

NTCIP 1403 version 97.01.01, July 31, 1998. Approved by AASHTO in July 1999, approved by ITE in October 1999, and approved by NEMA in February 2000.

NTCIP 1403 v01.02, December 1, 2000. Incremented version number and updated date; added and revised front matter; updated references to NTCIP and NEMA document numbers in References Clause; updated references to ITE document numbers; revised section numbering inserted introduction text in Section on Requirements; deleted Annex A Comment Form; and inserted introduction text in Annex on the ASN.1 Script.

Draft NTCIP 1403 v01.03 Amendment 1, August 2002. Updated references, updated data requirements format to conform to IEEE 1489:1999 and 1489:2000, and incorporated changes as described in the document.

If you are not willing to abide by the following copyright statement, return these materials immediately.

Joint AASHTO, ITE, and NEMA
NTCIP Management Information Base, Data Dictionary, and ASN.1 Script
DISTRIBUTION NOTICE

To the extent and in the limited event these materials are distributed by AASHTO/ITE/NEMA in the form of a Data Dictionary and ASN.1 Script ("DD"), AASHTO / ITE / NEMA extends the following permissions:

- (i) you may make and/or distribute unlimited copies (including derivative works) of a Data Dictionary (DD), including copies for commercial distribution, provided that (a) each copy you make and/or distribute contains this Notice;
- (ii) use of the DD is restricted in that the syntax field may be modified only to reflect a more restrictive subrange or enumerated values;
- (iii) the description field may be modified but only to the extent that: (a) only those bit values or enumerated values that are supported are listed; and (b) the more restrictive subrange is expressed.

These materials are delivered "AS IS" without any warranties as to their use or performance.

AASHTO / ITE / NEMA AND THEIR SUPPLIERS DO NOT WARRANT THE PERFORMANCE OR RESULTS YOU MAY OBTAIN BY USING THESE MATERIALS. AASHTO/ITE/NEMA AND THEIR SUPPLIERS MAKE NO WARRANTIES, EXPRESS OR IMPLIED, AS TO NONINFRINGEMENT OF THIRD PARTY RIGHTS, MERCHANTABILITY, OR FITNESS FOR ANY PARTICULAR PURPOSE. IN NO EVENT WILL AASHTO, ITE, OR NEMA OR THEIR SUPPLIERS BE LIABLE TO YOU OR ANY THIRD PARTY FOR ANY CLAIM OR FOR ANY CONSEQUENTIAL, INCIDENTAL, OR SPECIAL DAMAGES, INCLUDING ANY LOST PROFITS OR LOST SAVINGS, ARISING FROM YOUR REPRODUCTION OR USE OF THESE MATERIALS, EVEN IF AN AASHTO, ITE, OR NEMA REPRESENTATIVE HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Some states or jurisdictions do not allow the exclusion or limitation of incidental, consequential, or special damages, or the exclusion of implied warranties, so the above limitations may not apply to you.

Use of these materials does not constitute an endorsement or affiliation by or between AASHTO, ITE, or NEMA and you, your company, or your products and services.

Disclaimer

The information in this publication was considered technically sound by the consensus of persons engaged in the development and approval of the document at the time it was developed. Consensus does not necessarily mean that there is unanimous agreement among every person participating in the development of this document.

AASHTO, ITE, and NEMA standards and guideline publications, of which the document contained herein is one, are developed through a voluntary consensus standards development process. This process brings together volunteers and/or seeks out the views of persons who have an interest in the topic covered by this publication. While AASHTO, ITE, and NEMA administer the process and establish rules to promote fairness in the development of consensus, they do not write the document and they do not independently test, evaluate, or verify the accuracy or completeness of any information or the soundness of any judgments contained in their standards and guideline publications.

AASHTO, ITE, and NEMA disclaim liability for any personal injury, property, or other damages of any nature whatsoever, whether special, indirect, consequential, or compensatory, directly or indirectly resulting from the publication, use of, application, or reliance on this document. AASHTO, ITE, and NEMA disclaim and make no guaranty or warranty, express or implied, as to the accuracy or completeness of any information published herein, and disclaims and makes no warranty that the information in this document will fulfill any of your particular purposes or needs. AASHTO, ITE, and NEMA do not undertake

to guarantee the performance of any individual manufacturer or seller's products or services by virtue of this standard or guide.

In publishing and making this document available, AASHTO, ITE, and NEMA are not undertaking to render professional or other services for or on behalf of any person or entity, nor are AASHTO, ITE, and NEMA undertaking to perform any duty owed by any person or entity to someone else. Anyone using this document should rely on his or her own independent judgment or, as appropriate, seek the advice of a competent professional in determining the exercise of reasonable care in any given circumstances. Information and other standards on the topic covered by this publication may be available from other sources, which the user may wish to consult for additional views or information not covered by this publication.

AASHTO, ITE, and NEMA have no power, nor do they undertake to police or enforce compliance with the contents of this document. AASHTO, ITE, and NEMA do not certify, test, or inspect products, designs, or installations for safety or health purposes. Any certification or other statement of compliance with any health or safety-related information in this document shall not be attributable to AASHTO, ITE, or NEMA and is solely the responsibility of the certifier or maker of the statement.

NTCIP is a trademark of AASHTO / ITE / NEMA.

Section 1 GENERAL

1.2.1 Normative References

-- Updated the publications information for Normative References

draft NTCIP 1400:2002 Amendment 1, *Transit Communications Interface Profile Framework*, version 1.05 Amendment 1.

draft NTCIP 1401:2002 Amendment 1, *Transit Communications Interface Profile, Standard on Common Public Transportation Objects*, version 1.03 Amendment 1, August, 2002.

draft NTCIP 1404:2002 Amendment 1, *Transit Communications Interface Profile, Standard on Scheduling and Runcutting Objects*, version 1.03 Amendment 1, August, 2002.

draft NTCIP 1405:2002 Amendment 1, *Transit Communications Interface Profile, Standard on Spatial Representation Objects*, version 1.03 Amendment 1, August, 2002.

draft NTCIP 1408:2002 Amendment 1, *Transit Communications Interface Profile, Standard on Fare Collection Objects*, version 1.03 Amendment 1, August, 2002.

ISO/IEC 8824:1998, *Abstract Syntax Notation One (ASN.1)*

1.2.2 Informative References

-- Updated the publications information for Informative References

IEEE Std 1489-1999, *IEEE Standard for Data Dictionaries for Intelligent Transportation Systems*. 27 October 1999.

IEEE Std 1488-2000, *IEEE Trial-Use Standard for Message Set Template for Intelligent Transportation Systems*. 13 July 2000.

Section 2
TERMINOLOGY


-- no changes

Section 3 CONCEPT OF OPERATIONS

-- Modified section title to Concept of Operations

3.3.2 TCIP Classification Tree

-- updated Figure 3.1 Classification Tree

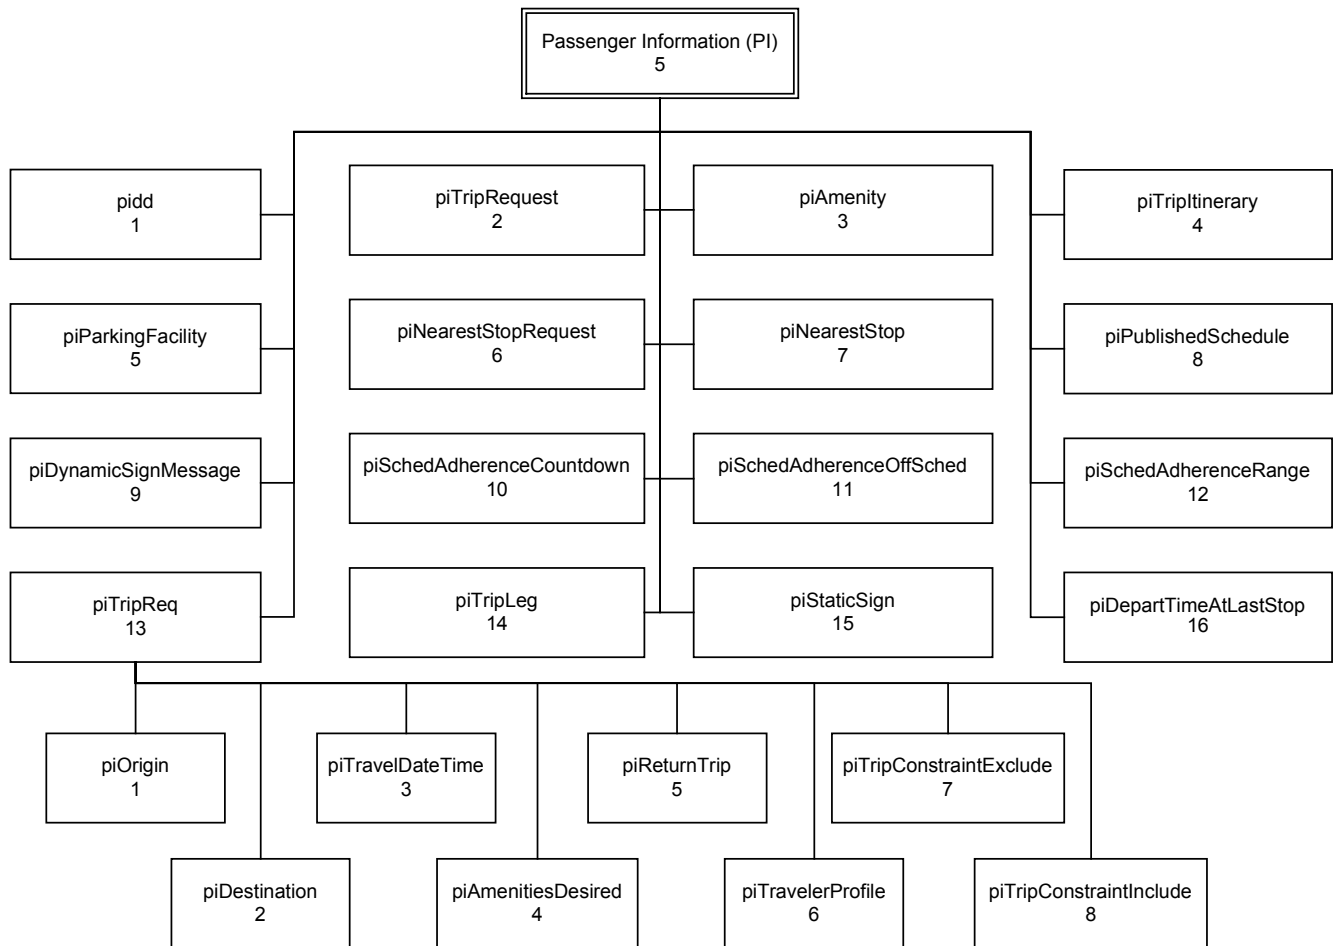

Section 4 REQUIREMENTS

4.1 PASSENGER INFORMATION DATA DICTIONARY

PI_AccessPreference_cd

(1) *The error codes shall be removed from the code list.*

Representation layout	PI-AccessPreference ::= INTEGER { walk (1), -- (or go to, e.g., via wheelchair bicycle (2), park-ride (3), -- drive-park kiss-ride (4), -- drive and be dropped off } (0..255)
Valid value rule	1 walk (or go to, e.g., via wheelchair) 2 bicycle 3 drive and park/park & ride 4 drive and be dropped off/ kiss & ride 5-149 Reserved for standard codes 150-255 Reserved for local use

PI_ADAAccess_cd

(1) *The error codes shall be removed from the code list.*

Representation layout	PI-ADAAccess ::= INTEGER { notCompliant (1), fullyCompliant (2), mobilityChallengedAccess (3), visuallyImpairedAccess (4), hearingImpairedAccess (5), mobility-VisuallyImpairedAccess (6), visually-HearingImpairedAccess (7), mobility-MobilityImpairedAccess (8), -- 9-149 reserved -- 150-255 local use } (0..255)
Valid value rule	1 Not ADA compliant 2 ADA fully compliant 3 Accessible to mobility challenged individuals 4 Accessible to visually impaired individuals 5 Accessible to hearing impaired individuals 6 Accessible to mobility and visually impaired individuals 7 Accessible to visually and hearing impaired individuals 8 Accessible to hearing and mobility impaired individuals 9-149 Reserved for standard codes 150-255 Reserved for local use

PI_ADANeed_cd

(1) *The error codes shall be removed from the code list.*

Representation layout	PI-ADANeed ::= INTEGER
------------------------------	------------------------

```
{  
  noADANeed (1),  
  mobilityAssistanceRequired (2),  
  visualAssistanceRequired (3),  
  audioAssistanceRequired (4),  
  otherAssistanceRequired (5),  
  visual-AudioAssistanceRequired (6),  
  visual-MobilityAssistanceRequired (7),  
  audio-MobilityAssistanceRequired (8),  
  visual-Audio-MobilityAssistanceRequired (9),  
  -- 10-149 reserved  
  -- 150-255 local use  
} (0..255)
```

Valid value rule

1 No ADA need
2 Mobility Need
3 Visual assistance required
4 Audio assistance required
5 Other assistance required
6 A combination of visual and audio assistance required
7 A combination of visual and mobile assistance required
8 A combination of audio and mobile assistance required
9 A combination of visual, mobile, and audio assistance required
10-149 Reserved for standard codes
150-255 Reserved for local use

PI_AmenityID_id

(1) *The Representative class term (in descriptive name and field) shall be modified to identifier (id).*

Descriptive Name PI_AmenityID_id
Representation class term identifier

PI_AmenityStatus_cd

(1) *The error codes shall be removed from the code list.*

Representation layout PI-AmenityStatus ::= INTEGER
{ outOfOrder (1),
 operational (2),
 -- 3-149 reserved
 -- 150-255 local use
} (0..255)

Valid value rule 1 Out of order
2 Operational
3-149 Reserved for standard codes
150-255 Reserved for local use

PI_DesiredTrip_cd

(1) *The error codes shall be removed from the code list.*

Representation layout PI-DesiredTrip ::= INTEGER
{ departDesignatedTime (1),
 -- leave at designated time
 arriveDesignatedTime (2),
 -- Arrive at a designated time
 firstTrip (3), -- First trip of the day
 lastTrip (4), -- Last trip of the day
 nextTrip (5), -- The next trip
 -- 6-149 reserved

-- 150-255 local use

} (0..255)

Valid value rule

- 1 Leave at a designated time
- 2 Arrive at a designated time
- 3 First trip of the day
- 4 Last trip of the day
- 5 The next trip
- 6-149 Reserved for standard codes
- 150-255 Reserved for local use

PI_EstimatedArrivalRange_cd

(1) *The error codes shall be removed from the code list.*

Representation layout

```
PI-EstimatedArrivalRange ::= INTEGER
{ onTime (1), -- On-time
  early (2), -- Early
  lateOneMin (3), -- 0-1 minutes late
  lateOneTwoMin (4), -- 1-2 minutes late
  lateTwoThreeMin (5), -- 2-3 minutes late
  lateTwoFourMin (6), -- 2-4 minutes late
  lateThreeFourMin (7), -- 3-4 minutes late
  lateThreeFiveMin (8), -- 3-5 minutes late
  lateFourFiveMin (9), -- 4-5 minutes late
  lateTwoFiveMin (10), -- 2-5 minutes late
  lateFiveSevenMin (11), -- 5-7 minutes late
  lateSevenTenMin (12), -- 7-10 minutes late
  lateFiveTenMin (13), -- 5-10 minutes late
  lateTenFifteenMin (14), -- 10-15 minutes late
  lateFifteenTwentyMin (15), -- 15-20 minutes late
  lateMoreThanTwentyMin (16),
    -- More than 20 minutes late
    -- 17-149 reserved
    -- 150-255 local use
}
```

Valid value rule

- 1 On time
- 2 Early
- 3 0-1 minutes late
- 4 1-2 minutes late
- 5 2-3 minutes late
- 6 2-4 minutes late
- 7 3-4 minutes late
- 8 3-5 minutes late
- 9 4-5 minutes late
- 10 2-5 minutes late
- 11 5-7 minutes late
- 12 7-10 minutes late
- 13 5-10 minutes late
- 14 10-15 minutes late
- 15 15-20 minutes late
- 16 More than twenty minutes late
- 17-149 Reserved for standard codes
- 150-255 Reserved for local use

PI_InformationType_cd

(1) *The error codes shall be removed from the code list.*

Representation layout

```
PI-InformationType ::= INTEGER
{ staticSign (1), -- static sign with station stop ID/name
  routes (2),
  schedules (3),
}
```

fares (4),
system-map (5),
area-map (6),
timetables (7), -- printed and removable
real-time-information (8),
attended (9), -- agent or attended phone for information
-- 10-149 reserved
-- 150-255 local use
} (0..255)

Valid value rule

1 static sign with station stop ID/name
2 routes
3 schedules
4 fares
5 system map
6 area map
7 timetables (printed and removable)
8 real-time information
9 agent/attendant or attended phone for information
10-149 Reserved for standard codes
150-255 Reserved for local use

PI_MarkerType_cd

(1) *The error codes shall be removed from the code list.*

Representation layout

PI-MarkerType ::= INTEGER
{ posted (1), -- Posted Sign
shelter (2), -- at Station or Shelter
post (3), -- concrete post
-- 4-149 reserved
-- 150-255 local use
} (0..255)

Valid value rule

1 Posted Sign
2 Station/Shelter
3 Concrete Post
4-149 Reserved for standard codes
150-255 Reserved for local use

PI_Minimize_cd

(1) *The error codes shall be removed from the code list.*

Representation layout

PI-Minimize ::= INTEGER
{ transfers (1), -- Minimize transfers
travelTime (2), -- Minimize travel time
cost (3), -- Minimize cost
walking (4), -- Minimize walking distance
waitTime (5), -- Minimize wait time
-- 6-149 reserved
-- 150-255 local use
} (0..255)

Valid value rule

1 Minimize transfers
2 Minimize travel time
3 Minimize cost
4 Minimize walking distance
5 Minimize wait time
6-149 Reserved for standard codes
150-255 Reserved for local use

PI_NextLeg_cd

(1) *The error codes shall be removed from the code list.*

Representation layout PI-NextLeg ::= INTEGER
{ no (1),
yes (2),
-- 3-149 reserved
-- 150-255 local use
} (0..255)

Valid value rule
1 No
2 Yes
3-149 Reserved for standard codes
150-255 Reserved for local use

PI_ParkingEntranceID_id

(1) *The Representative class term (in descriptive name and field) shall be modified to identifier (id).*

Descriptive Name PI_ParkingEntranceID_id
Representation class term identifier

PI_ParkingFacID_id

(1) *The Representative class term (in descriptive name and field) shall be modified to identifier (id).*

Descriptive Name PI_ParkingFacID_id
Representation class term identifier

PI_ParkingType_cd

(1) *The error codes shall be removed from the code list.*
(2) *The Valid value rules were modified to provide additional clarity.*

Representation layout PI-ParkingType ::= INTEGER
{ open (1), -- Open lot
garage (2),
permit (3),
contract (4),
free (5),
pay (6),
other (7),
-- 8-149 reserved
-- 150-255 local use
} (0..255)

Valid value rule -- types are not mutually exclusive

1 Open lot -- uncovered or surface lot
2 Garage
3 Permit parking
4 Contract Parking
5 Free Parking
6 Paid Parking
7 Other
8-149 Reserved for standard codes
150-255 Reserved for local use

PI_ParkingVehicleClass_cd

(1) Reorganized codes to reflect the following:

all (1), compact (2), standard (3), van (4), oversized (5), truck (6), bus (7)

Representation layout

```
PI-ParkingVehicleClass ::= INTEGER
{ standard (1),
  compact (2),
  van (3),
  oversized (4),
  -- 5-149 reserved
  -- 150-255 local use
} (0..255)
```

Valid value rule

```
1 all
2 compact
3 standarf
4 van
5 oversized
6 truck
7 bus
8-149 Reserved for standard codes
150-255 Reserved for local use
```

PI_SignID_id

(1) *The Representative class term (in descriptive name and field) shall be modified to identifier (id).*

Descriptive Name

PI_SignID_id

Representation class term

identifier

PI_SignType_cd

(1) *The error codes shall be removed from the code list.*

Representation layout

```
PI-SignType ::= INTEGER
{ dynamic (1),
  notDynamic (2),
  other (3),
  -- 4-149 reserved
  -- 150-255 local use
} (0..255)
```

Valid value rule

```
1Dynamic,
2 Not dynamic
3 Other,
4-149 Reserved for standard codes
150-255 Reserved for local use
```

PI_TravelerID_id

(1) *The Representative class term (in descriptive name and field) shall be modified to identifier (id).*

Descriptive Name

PI_TravelerID_id

Representation class term

identifier

PI_TripOptionID_id

(1) The Representative class term (in descriptive name and field) shall be modified to identifier (id).

Descriptive Name	PI_TripOptionID_id
Representation class term	identifier

4.2 MESSAGE SET

PiTripLeg_message

- (1) In message body, changed Type Reference for fareTransaction to FcFareCharacterCost.
- (2) Add 3 OPTIONAL fields for route identifier or name (also added WITH COMPONENTS to ensure use of at least one of the fields in the message).

Message body

```
PiTripLeg ::=SEQUENCE {  
  optionID PI-TripOptionID,  
  toOriginWalk PI-WalkingDirections OPTIONAL,  
  directionDriving PI-DrivingDirections OPTIONAL,  
  parking-lots SEQUENCE OF PiParkingFacility OPTIONAL,  
  stopName CPT-StopPointName,  
  stopDescr CPT-StopPointDescription OPTIONAL,  
  mode CPT-Mode OPTIONAL,  
  agencyID CPT-AgencyID OPTIONAL,  
  routeDirection SCH-RouteDirectionName,  
  routeID SCH-RouteID OPTIONAL, -- **added new field  
  routeDesignator SCH-RouteDesignator OPTIONAL --**added new field  
  routeName SCH-RouteName OPTIONAL --**added new field  
  sign PiStaticSign OPTIONAL,  
  departPoint SpPointclass OPTIONAL,  
  departSchedule PI-DepartTimeScheduled,  
  departSchedNext PI-DepartTimeSchedNext OPTIONAL,  
  arriveSchedule PI-ArriveTimeScheduled OPTIONAL,  
  arrivePoint SpPointclass OPTIONAL,  
  toEndWalk PI-WalkingDirections OPTIONAL,  
  fareTransaction FcFareCharacterCost OPTIONAL,  
  schedAdhCountdown PiSchedAdherenceCountdown OPTIONAL,  
  footnote PI-Footnote OPTIONAL,  
  nextLeg PI-NextLeg OPTIONAL  
} -- at least one route index must be included  
(WITH COMPONENTS {..., routeID PRESENT} |  
 WITH COMPONENTS {..., routeDesignator PRESENT} |  
 WITH COMPONENTS {..., routeName PRESENT} )
```

PiParkingFacility_message

- (1) Reorganized message to provide information on parking availability information for different types of vehicle classes.

Message body

```
PiParkingFacility ::=SEQUENCE {  
  parkingFacID PI-ParkingFacID,  
  stopID CPT-StopPointID,  
  owner PI-ParkingOwnerName OPTIONAL,  
  phone PI-ParkingFacPhone OPTIONAL,  
  spacesTotal PI-ParkingSpacesTotal OPTIONAL,  
  modes SEQUENCE OF CPT-Mode OPTIONAL,  
  spacesTotal PI-ParkingSpacesTotal OPTIONAL,  
  operatingHours PI-ParkingHoursofOperation OPTIONAL,  
  parkingProvided SEQUENCE OF {  
    vehicleClass PI-ParkingVehicleClass,  
    spacesAvailable PI-ParkingAvailability OPTIONAL,  
    rates PI-ParkingRates OPTIONAL,  
    entrances SEQUENCE OF PI-ParkingEntranceID OPTIONAL,  
    fillTime PI-ParkingFillTime OPTIONAL,  
    footnote PI-Footnote OPTIONAL } OPTIONAL  
}
```

PiNearestStop_message

(1) Add field name in last field of message body. Call field name *stopPtAttribute-list*.

Message body PiNearestStop ::= SEQUENCE {
stopID CPT-StopPointID,
location SpPointclass, -- the location of the nearest stop
mode CPT-Mode OPTIONAL,
routeID SCH-RouteID OPTIONAL,
rtDirection SCH-RouteDirectionName OPTIONAL,
stopPtAttribute-list SEQUENCE OF CPT-StopPointAttribute OPTIONAL
}

PiSchedAdherenceRange_message

(1) Add new field in message to reflect confidence level of value.

Message body PiSchedAdherenceRange ::=SEQUENCE {
routeID SCH-RouteID,
routeName SCH-RouteName OPTIONAL,
tripID SCH-TripID,
vehicleID CPT-PTVehicleID,
stopID CPT-StopPointID,
estimatedArrivalRange PI-EstimatedArrivalRange,
tolerance OB-ConfidenceMeasure OPTIONAL -- measurement is in seconds
}

PiSchedAdherenceCountdown_message

(1) Add new field in message to reflect confidence level of value.

Message body PiSchedAdherenceCountdown ::= SEQUENCE {
routeID SCH-RouteID,
routeName SCH-RouteName OPTIONAL,
tripID SCH-TripID,
vehicleID CPT-PTVehicleID,
stopID CPT-StopPointID,
nextArrivalCountdown PI-NextArrivalCountdown,
tolerance OB-ConfidenceMeasure OPTIONAL -- measurement is in seconds
}

PiSchedAdherenceOffSched_message

(1) Add new field in message to reflect confidence level of value.

Message body PiSchedAdherenceOffSched ::= SEQUENCE {
routeID SCH-RouteID,
routeName SCH-RouteName OPTIONAL,
tripID SCH-TripID,
vehicleID CPT-PTVehicleID,
stopID CPT-StopPointID,
arriveTimeScheduled PI-ArriveTimeScheduled,
vehicleLocation SpPointclass, --The real-time location of a transit vehicle
offScheduleTime PI-OffSchedule,
tolerance OB-ConfidenceMeasure OPTIONAL -- measurement is in seconds
}

PiDynamicSignMessage_message

(1) Add field to reflect new type of schedule status *PiDepartAtLastStop*. Also added WITH COMPONENTS clause for option.

Message body

```
PiDynamicSignMessage ::=SEQUENCE{
datetime CPT-DateTime OPTIONAL,
route-name SCH-RouteName OPTIONAL,
service-type SCH-ServiceType OPTIONAL,
direction SCH-RouteDirectionName OPTIONAL,
arrive-time PI-ArriveTimeScheduled OPTIONAL,
depart-time PI-DepartTimeScheduled OPTIONAL,
adh-range PiSchedAdherenceRange OPTIONAL,
adh-countdown PiSchedAdherenceCountdown OPTIONAL,
adh-offsched PiSchedAdherenceOffSched OPTIONAL,
depart-at-last-stop PiDepartAtLastStop OPTIONAL,
message SEQUENCE OF PI-DMSMessage OPTIONAL
}
(WITH COMPONENTS {...,datetime PRESENT})
(WITH COMPONENTS {..., route-name PRESENT})
(WITH COMPONENTS {..., service-type PRESENT})
(WITH COMPONENTS {..., direction PRESENT})
(WITH COMPONENTS {..., arrive-time PRESENT})
(WITH COMPONENTS {..., depart-time PRESENT})
(WITH COMPONENTS {...,adh-range PRESENT})
(WITH COMPONENTS {..., adh-countdown PRESENT})
(WITH COMPONENTS {..., adh-offsched PRESENT})
(WITH COMPONENTS {..., depart-at-last-stop PRESENT})
(WITH COMPONENTS {..., message PRESENT})
```

PiDepartTimeAtLastStop_message

Add new message

Message identifier	pi 16
Metadata source	Direct
Descriptive name	PiDepartTimeAtLastStop_message
Descriptive name context	Manage Transit
Definition	The time a PTV left the last stop point zone. (Note: The time a passenger vehicle left the stop point zone and closed the doors may not be at the same time.)
Source	
Class name	PI
Classification scheme name	TCIP
Classification scheme version	NTCIP 1400
Data concept type	Message
Keyword	
Related data concept	
Relationship type	
Remarks	
Symbolic name	
Symbolic name usage	
ASN1 Name	PiDepartAtLastStop
Constraints	
Message body	PiDepartAtLastStop ::= SEQUENCE { departTimeAtLastStop OB-StopPointZoneExit, stopID CPT-StopPointID, routeID SCH-RouteID OPTIONAL, routeName SCH-RouteName OPTIONAL, routeDirection SCH-RouteDirectionID OPTIONAL, tripID SCH-TripID OPTIONAL, vehicleID CPT-PTVehicleID OPTIONAL, tolerance OB-ConfidenceMeasure OPTIONAL -- measurement is in seconds }

```
} (WITH COMPONENTS {..., routeID PRESENT})  
  WITH COMPONENTS {..., routeName PRESENT} )
```


Section 5
CONFORMANCE REQUIREMENTS

Annex A
DATA ELEMENT/MESSAGE USE CROSS REFERENCE TABLE

(Informative)

Annex B
ASN.1 Script

(Informative)